



**CVBXW-SVID**

Conversion Box – S-Video/Comp to TMDS Fiber Wall Plate Type

Customer :

**Specification for**  
**Model : CVBXW-SVID**

Revised : Feb. 11. 2011  
Original Release Date : Jan 25, 2010

**OPHIT**



## Revision History

<b>Version Number</b>	<b>Revision Date</b>	<b>Author</b>	<b>Description of Changes</b>
1.0	Jan 25, 2010	J.H LEE	Initial Version
2.0	Feb. 11. 2011	J.H LEE	Electrical Specification / Case Dimension Modify



## **TABLE OF CONTENTS**

### **1. General Description**

### **2. General Specification**

### **3. Absolute Maximum Ratings**

### **4. Electrical & Optical Specification**

#### 4.1 Electrical Specification

#### 4.2 Optical Specification

#### 4.3 Connector Pin Assignment

##### 4.3.1 Input Connector

##### 4.3.2 Output Connector

### **5. Mechanical Specification**

#### 5.1 Case Dimension

#### 5.2 Optical Cable Information

### **6. RoHS**

## 1. General Description

**CVBXW-SVID**, is signal converter from composite/S-Video to TMDS optical signal, specially 1 fiber output to support maximum DVI resolutions up to 1024x768 (XGA).

This unit is enclosed by some box for wall mount.

- R, G, B, Clock signal is transmitted separately by one multi-mode optical fiber.
- 1 composite/s-video input, 1 fiber output to deliver TMDS signal
- Support common video input standards, including NTSC and PAL
- Automatically detects the input signal and transmit TMDS output signal
- No input signal is automatically Power-down mode(LD Turn-off)
- Output resolution 1024x768@60Hz fixed
- DVI Specification 1.0 Compliant
- Product state define : Power ON : Green color LED ON

Input signal detect : Yellow color LED ON

## 2. General Specification

<b>Input Format</b>	Composite Video(NTSC, PAL, SECAM), S-Video
Input Signal	Composite Video : 1Vp-p, 75Ω S-Video : Y=1Vp-p, 75Ω / C=0.7Vp-p, 75 Ω
<b>Optical Output</b>	SC type optical connector
Fiber	Multi-mode 50/125 or 62.5/125 μm SC fiber
Transmission distance	1,650 ft(500M)
<b>Connector</b>	
Input	BNC / 4 Pin DIN
Output	SC Type Optical
Power	3.5 mm pitch 3 position terminal (Phoenix Contact)
<b>General</b>	
Dimensions	115(W) x 70(H) x 90.6(D) mm
Weight	--
Enclosure Color	Silver
Power	DC +12V, 1.5A



**3. Absolute Maximum Ratings**

Parameter	Rating
Storage temperature	-20°C ~ +70°C
Operating temperature	0°C ~ +50°C
Power Supply	-0.3 ~ +12 V
Relative Humidity	10 ~ 80 %
Lead solder temperature	380°C +/-30°C, 10 seconds

**NOTICE**

Stresses greater than those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operations section for extended periods of time may affect reliability.

#### 4. Electrical & Optical Specification

##### 4.1 Electrical Specification

Parameter		Symbol	Min	Typ	Max	Units	Condition
POWER	Supply Voltage	Vcc		+ 12		V	
	Supply Current	Icc		320		mA	Standby
				380			Working
	Power Dissipation	Po		3.84		W	Standby
				4.56			Working

##### 4.2 Optical Specification

Parameter (per Channel)	Symbol	Min	Typ	Max	Units
Optical Power <sup>1</sup>	Pout	-3.0	0.0		dBm
Optical Modulation Amplitude		-6.25			dBm
Center Wavelength – Lane 0		771.5	778	784.5	nm
Center Wavelength – Lane 1		793.5	800	806.5	nm
Center Wavelength – Lane 2		818.5	825	831.5	nm
Center Wavelength – Lane 3		843.5	850	856.5	nm
Optical Rise/Fall Time <sup>2</sup> (P1TX4B-SX4V-01)			200		Ps
RMS Spectral Width			0.5		nm

**Notes:**

Transmitter module of Model CVBXW-SVID includes VCSEL (Vertical Surface Emitting Laser Diode) with 850 nm invisible laser radiation.

*Do not view directly laser module of transmitter or the end of the other side of optical cable connected to transmitter with optical instrument.*


Transmitter module of CVBXW-SVID is Class 1M Laser Product.

<sup>1</sup> Total power at measured at 4ch on the end of 2m optical cable (62.5µm fiber).

<sup>2</sup> Rise and fall times measured from 20 - 80%

4.3 Connector Pin Assignment


4.3.1 Input Connector

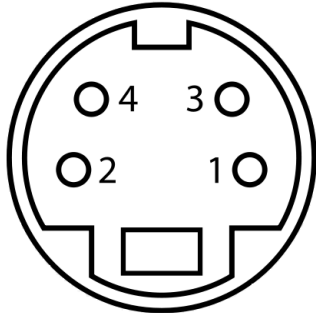

Female Connector

<S-Video 1 Mini-DIN 4 Pin type>

Pin	Signal Assignment
1	GND / Ground (Y)
2	GND / Ground (C)
3	Y / Intensity (Luminance)
4	C / Color (Chrominance)

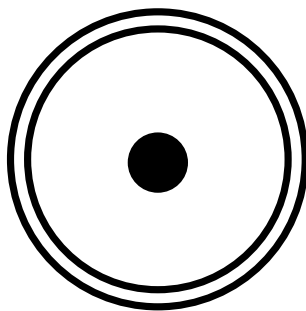


Female Connector

<Composite video BNC type>

Pin	Signal Assignment
1	1 plus screen

4.3.2 Output Connector

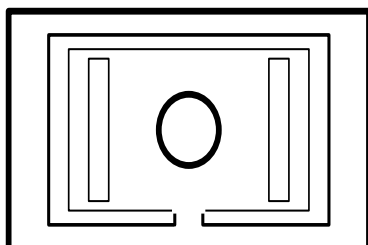


Female Connector

<SC Connector type>

Pin	Signal Assignment
1	T.M.D.S. optical output

**5. Mechanical Specification**



**5.1 Case Dimension**

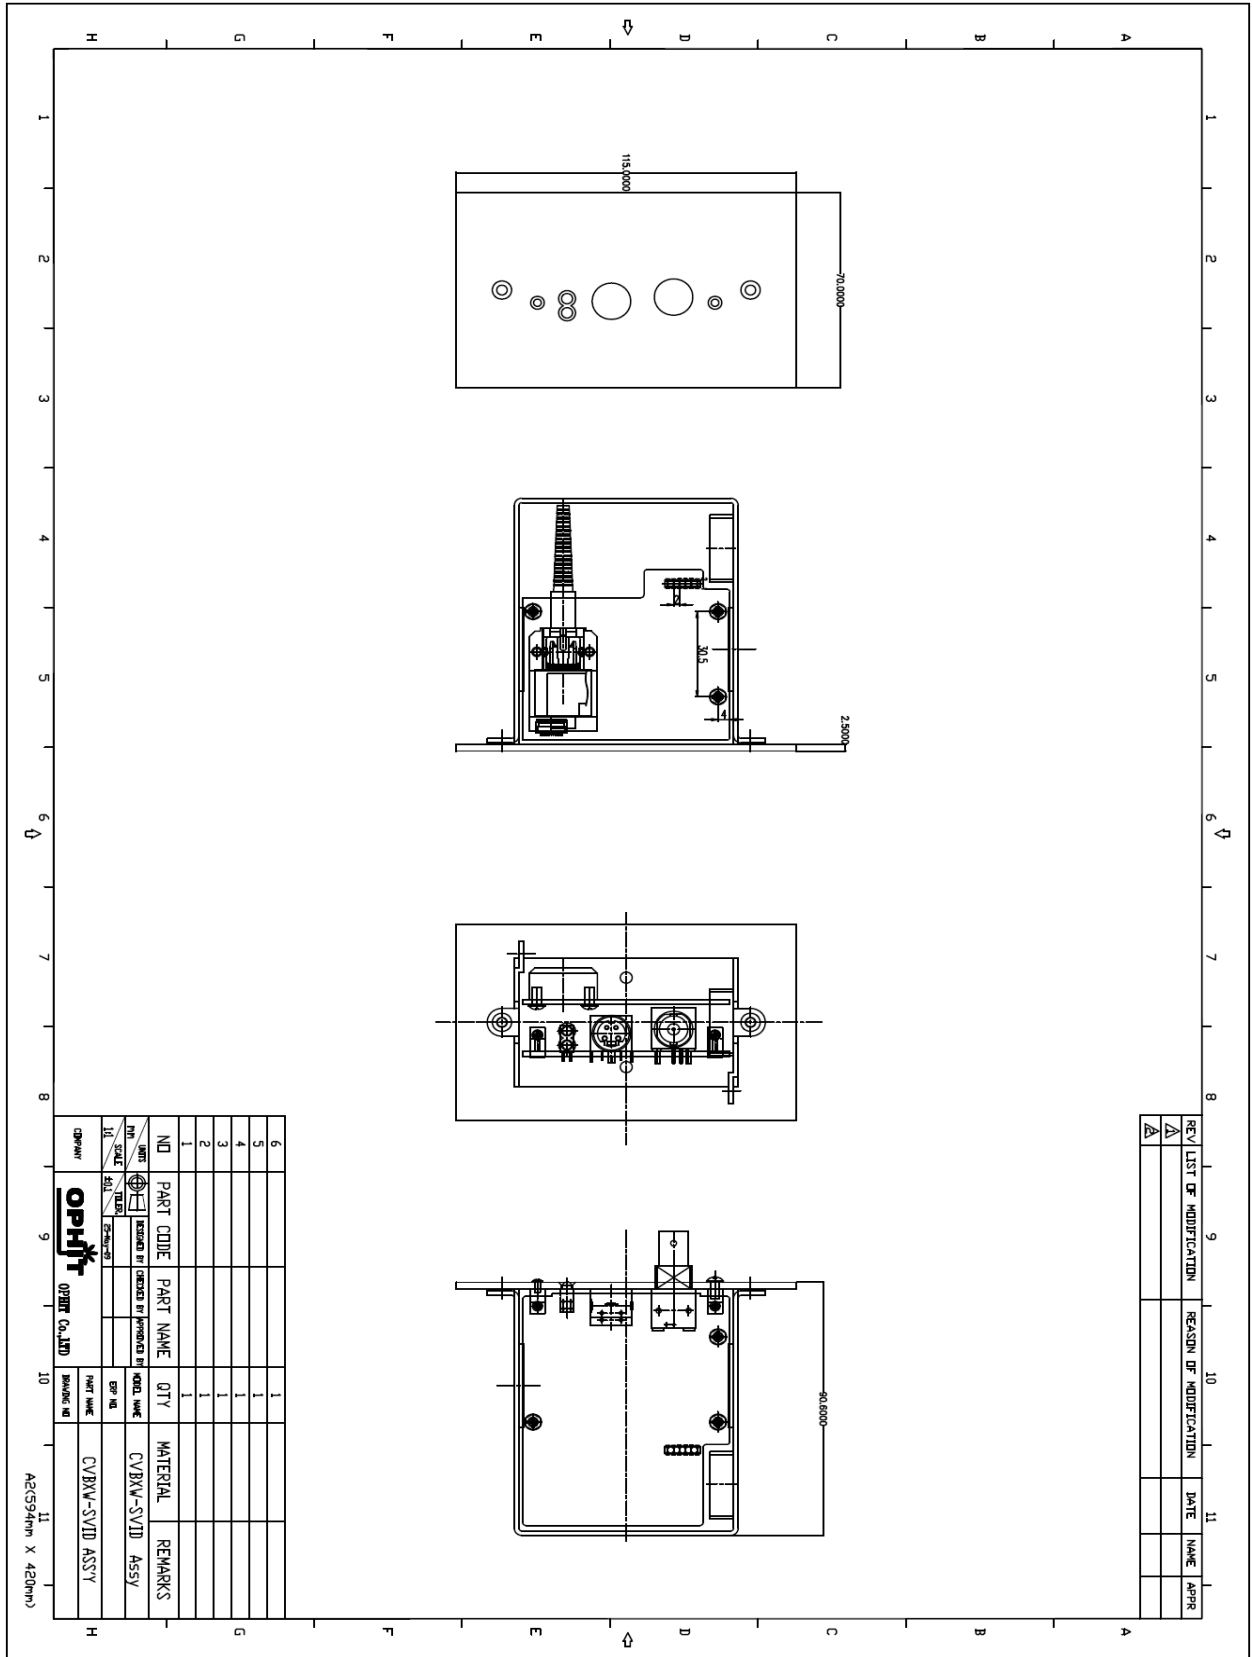



5.2 Optical Cable Information

- Outdoor Type Cable

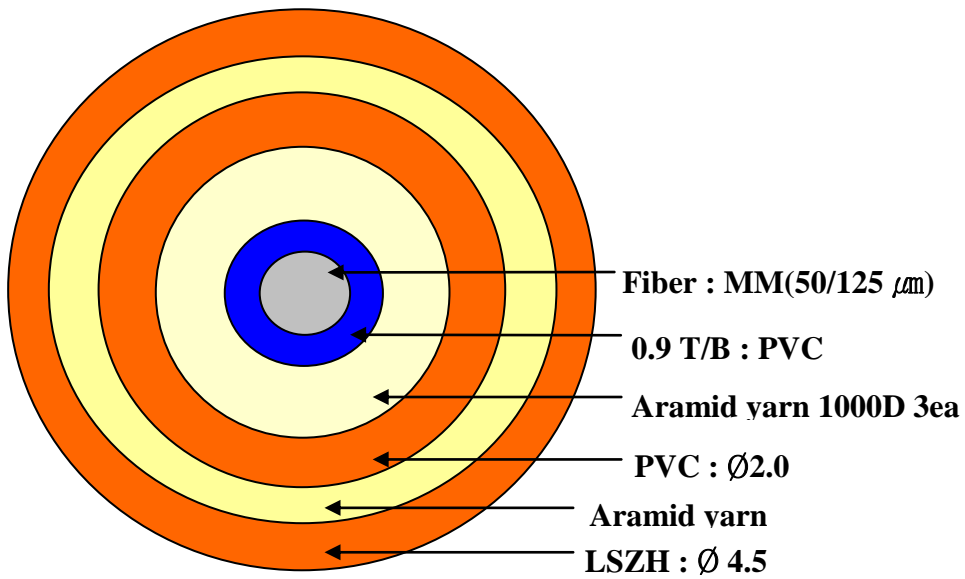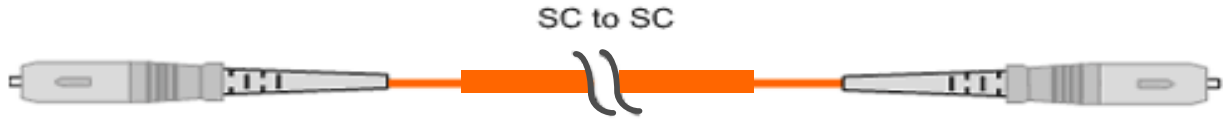



## 6. RoHS

### Certificate of Conformance RoHS

Dear Customer,

On January 27, 2003, the European Parliament and the Administrative Council adopted Directive 2002/95/EC (RoHS) that concerns the “Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment”.

The parts currently delivered by **OPHIT CO., LTD.** are already free of lead (Pb), mercury (Hg), cadmium (Cd), hexavalent chromium (Cr 6), polybrominated biphenyl (PBB) and poly brominated diphenyl (PBDE).

This Certification of Conformance is to certify that the products listed below comply with RoHS Directive mentioned above:

- CVBXW-SVID

If you have any further questions regarding the RoHS compliance of parts delivered by **OPHIT CO., LTD.**, please do not hesitate to contact us at [support@ophit.com](mailto:support@ophit.com).

Best regards,

JONG-KOOK MOON/CEO

OPHIT CO., LTD.