

PRODUCT DATA SHEET

FTHS

Optical HDMI 2.0 Extension System



Revision History

Version Number	Revision Date	Page	Description of Changes
1.0	June 01, 2016	ALL	Initial Version
1.1	Oct 04, 2016	10	Compatibility test update
1.2	Oct 10, 2017	6	Electrical Specification modified
1.3	Oct.07.2019	ALL	Renewal Specification

PROPRIETARY NOTE

****THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPIETARY TO OPHIT CO.,LTD
AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS
OR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED
AND WRITTEN CONSENT OF OPHIT INCORPORATION***

TABLE OF CONTENTS

1. General Description	4
2. General Specification	4
3. Absolute Maximum Ratings	5
4. Electrical Specification	6
4.1 Transmitter Box	
4.2 Receiver Box	
4.3 Connector Pin Assignment	
4.3.1 Transmitter and Receiver	
4.3.1.1 HDMI Connector	
5. Optical Specification	8
5.1 Transmitter Characteristics	
5.2 Receiver Characteristics	
6. Compatibility Test Result	10
7. Mechanical Specification	11
7.1 Transmitter and Receiver Case Dimension	
7.2 Design drawing	
7.3 Connection	
8. Regulatory	12
8.1 EMC & Safety Agency approval	
8.1.1 CE-EMC compliance	
8.1.2 FCC compliance	
8.1.3 Eye Safety	
9. Packing Information	12
10. RoHS	13
11. REACH	14

1. General Description

FTHS, This unique fiber optical transceiver let your PC, digital UHD monitor extend up to 200 meter(656ft) away from host based on HDMI standard without signal degradation by UHD (3840x2160 or 4096x2160 @60Hz) resolution.

- High Speed and long distance transmission by optical system
- Compatible with HDMI standard V2.0a
- Supports 50-micron OM3 or OM4 Fiber with an SC Connector
- Main-link video signal / DDC data and Hot Plug Detection signal is transmitted by- 1 channel multimode optical fiber
- External power supply use(TX, RX)
- SCDC(Status and Control Data Channel) compliant
- HDCP 2.2 compliant

※ Does not support CEC and HEAC

2. General Specification

Parameter	Symbol	
	Transmitter	Receiver
Optical Converter	850nm, 4Ch Transmit OSA 911nm, 1Ch VCSEL 980nm, 1Ch PIN P/D Diode	850nm, 4Ch Receive OSA 980nm, 1Ch VCSEL 911nm, 1Ch PIN P/D Diode
Input and Output Signal	HDMI 2.0a Standard	
Video Bandwidth	6Gbps / Channel	
Module Size	81.2mm(W) x 21.1mm(D) x 47.5mm(H)	
Optical Connector	SC Connector	
Electrical Connector	HDMI Female Connector (19 Pin)	
Applied Fiber	OM3 or OM4 Multi-mode glass-fiber.	
Maximum Supporting Resolution	UHD(3840x2160@60Hz / 4096x2160@60Hz)	
Transmission distance	200 meter (656 ft)	
External Power	5V / 2A (1.35ø DC JACK)	

3. Absolute Maximum Ratings

Parameter	Symbol	Minimum	Maximum	Units
Power Supply	V_{CC}	-0.3	+5.5	V
Operating temperature	V_{OT}	0	+50	°C
Storage temperature	V_{ST}	-20	+70	°C
Relative Humidity	H_{RH}	10	80	RH

NOTICE

Stresses greater than those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operations section for extended periods of time may affect reliability.

4. Electrical Specification

4.1 Transmitter Box

	Parameter	Symbol	Min	Typ	Max	Units	Condition
P O W E R	Supply Voltage(DC)	Vcc	+4.5	+5.0	+5.5	V	
	Supply Current	Icc		630		mA	
	Power Dissipation	Po		3.15		W	
S I G N A L	Diff. P-to-P Input Voltage	V _{ID_PP}	75		1560	mVpp	
	Hot Plug Output Voltage	HPD		3.3		V	

4.2 Receiver Box

	Parameter	Symbol	Min	Typ	Max	Units	Condition
P O W E R	Supply Voltage	Vcc	+4.5	+5.0	+5.5	V	
	Supply Current	Icc		560		mA	
	Power Dissipation	Po		2.80		W	
S I G N A L	Diff. P-to-P Output Voltage	V _{ID_PP}	800		1200	mV	
	Hot Plug Detect Voltage	HPD	2.1		5.0	V	

4.3 Connector Pin Assignment

4.3.1 Transmitter and Receiver

4.3.1.1 HDMI Connector

Pin	Signal Assignment	Pin	Signal Assignment
1	T.M.D.S. Data2 +	11	T.M.D.S Clock Shield
2	T.M.D.S. Data2 Shield	12	T.M.D.S Clock -
3	T.M.D.S. Data2 -	13	No Connect
4	T.M.D.S. Data1 +	14	No Connect
5	T.M.D.S. Data1 Shield	15	SCL
6	T.M.D.S. Data1 -	16	SDA
7	T.M.D.S. Data0 +	17	DDC Ground
8	T.M.D.S. Data0 Shield	18	+5V POWER
9	T.M.D.S. Data0 -	19	Hot Plug Detect
10	T.M.D.S Clock +		


5. Optical Specification

5.1 Transmitter Characteristics

Optical Parameter	Symbol	Min	Typ	Max	Units	Conditions
Transmit Wavelength Lane 0	λ_0		778		nm	
Transmit Wavelength Lane 1	λ_1		801		nm	
Transmit Wavelength Lane 2	λ_2		824		nm	
Transmit Wavelength Lane 3	λ_3		850		nm	
Transmit Wavelength Lane 4	λ_4		911		nm	
Optical Modulation Amplitude (Lanes 0 – 4)	OMA	-6.0			dBm	
Rise/Fall time (Lanes 0 – 3)	r/f			77	ps	Differential, 20%-80%
Rise/Fall time Lane 4	r/f			300	ps	Differential, 20%-80%
Peak Optical Output Power	P_{PEAK}			3.0	dBm	
OMA Sensitivity BER=1e-12, Lane 5	SEN			-12.5	dBm	
Total RMS Jitter, (Lanes 0 – 3) ¹	TJ_{RMS}			10	ps	
Total Jitter (P-P)	$TJ_{P=P}$			45	ps	
SD Guaranteed Off – Lane 5				-24	dBm	
SD Guaranteed On – Lane 5		-13			dBm	
SD Hysteresis – Lane 5		1.0			dB	

Transmitter module of Model FTTHS includes 4 channel VCSEL(Vertical Surface Emitting Laser Diode) with 850, 911, 980nm invisible laser radiation.

Transmitter module of FTTHS is Class 3R Laser Product.

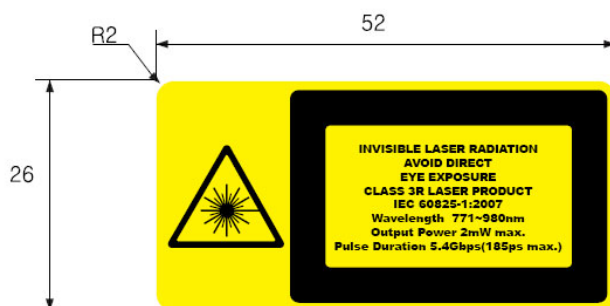

5.2 Receiver Characteristics

Optical Parameter	Symbol	Min	Typ	Max	Units	Conditions
Transmit Wavelength Lane 5	λ_5		980		nm	
OMA Sensitivity Lanes (0 – 3)	SENS			-12.5	dBm	6.0-Gbps BER =1E-12
OMA Sensitivity Lane 4	SENS			-12.5	dBm	1250 Mbps BER =1E-12
OMA – Lane 5	OMA	-6.0			dBm	
SD Guaranteed Off – (Lanes 0–3)	SD _{OFF}			-24	dBm	
SD Guaranteed On – (Lanes 0–3)	SD _{ON}	-13			dBm	
SD Guaranteed Off – Lane 4	SD _{OFF}			-24	dBm	
SD Guaranteed On – Lane 4	SD _{ON}	-13			dBm	
SD Hysteresis – All Lanes		1.0			dB	
Receive Wavelength Lane 0	λ_0		778		nm	
Receive Wavelength Lane 1	λ_1		801		nm	
Receive Wavelength Lane 2	λ_2		824		nm	
Receive Wavelength Lane 3	λ_3		850		nm	
Receive Wavelength Lane 4	λ_4		911		nm	

6. Compatibility Test Result

1) Source

- ① Nvidia_GTX 960
- ② Nvidia_GTX 970
- ③ Nvidia_GTX 980
- ④ Nvidia_Sheild (HDCP 2.2 Support)
- ⑤ Murideo_FRESCO Six-G (HDCP 2.2 Support / HDR Support)

2) Sink

- ① ViewSonic_VP2780-4K (4096x2160@60Hz)
- ② Samsung_U28E590 (3840x2160@60Hz)
- ③ LG_TV1_40UF6700 (4096x2160@60Hz)
- ④ LG_TV2_43UH6100 (4096x2160@60Hz / HDR Support)
- ⑤ LG_Monitor_27MU67 (3840x2160@60Hz)
- ⑥ VISIO_P502ui-B1 (4096x2160@60Hz / YCbCr 4:2:0)


3) Etc.

- ① 5V@2A (1.35pie) Adapter : 2EA
- ② SC Type OM3 Cable(200m) : 1EA
- ③ HDMI 1meter Cable(OPHIT OEM Cable) : 2EA

SINK SOURCE	ViewSonic (HDMI)	Samsung (HDMI Port 2)	LG TV1 (HDMI Port 2)	LG TV2 (HDMI Port 1)	LG Monitor (HDMI Port 1)	VISIO (HDMI Port 5)
GTX 960	OK	OK	OK	OK	OK	OK
GTX 970	OK	OK	OK	OK	OK	OK
GTX 980	OK	OK	OK	OK	OK	OK
SHILD	OK	OK	OK	OK	OK	OK
MURIDEO	OK	OK	OK	OK	OK	OK

7. Mechanical Specification

7.1 Transmitter and Receiver Case Dimension

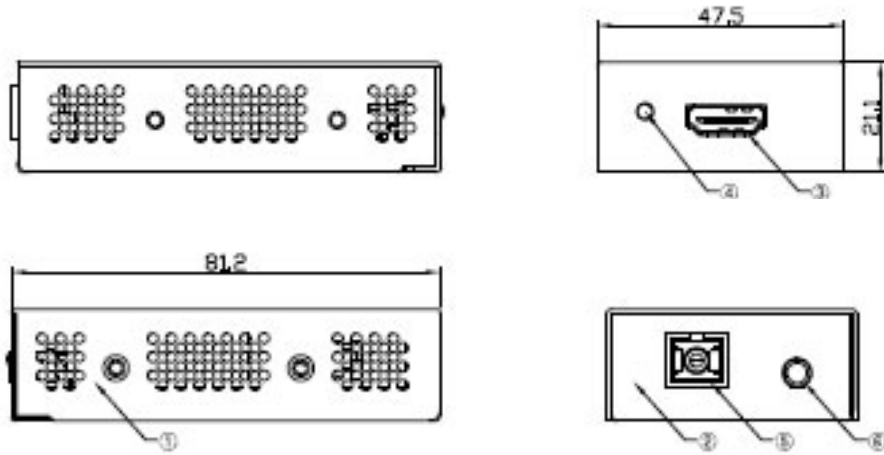

NO	PART NAME	NO	PART NAME	NO	PART NAME
1	TOP CASE	4	LED INDICATOR	-	
2	BOTTOM CASE	5	OPTICAL MODULE	-	
3	HDMI PORT	6	POWER JACK	-	

7.2 Design drawing


TX Assembly



RX Assembly



7.3 Connection

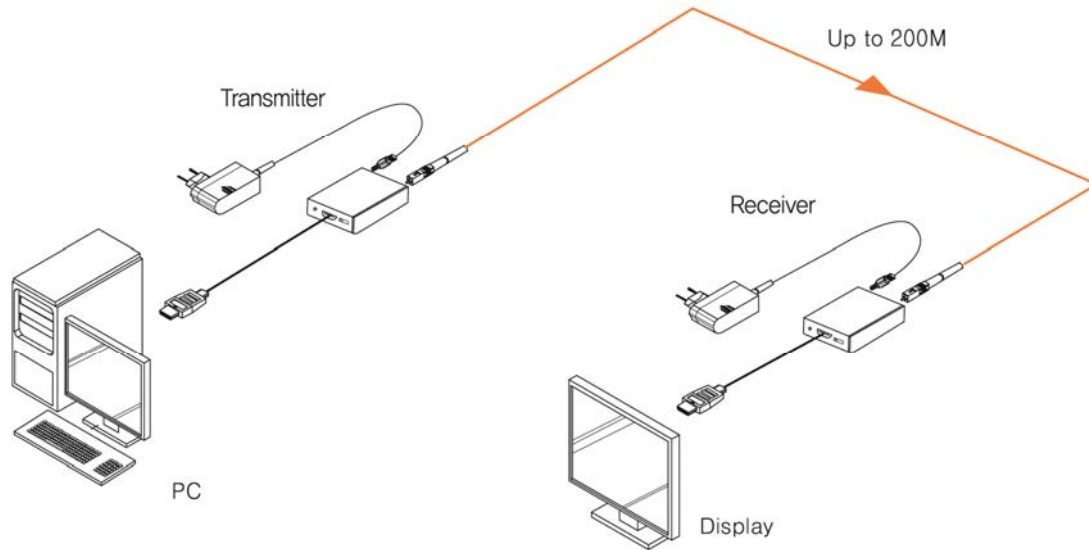

8. Regulatory

8.1 EMC & Safety Agency approval

8.1.1 CE-EMC compliance:

This Product is investigated to EN55032:2015, EN55024:2010, EN61000-3-2:2014 and EN61000-3-3:2013

8.1.2 FCC compliance:

This Product is investigated to FCC 47CFR part 2 and part 15

8.1.3 Eye Safety

This Product is investigated to IEC60825-1:2007(2nd Ed.)

9. Packing Information

Set(Unpacking, FTTHS Only)	81.2mm*47.5mm*21.1mm	134.8g
Package(1Set, Inner Box Packing)	242.0mm*185.0mm*70.0mm	890.0g
Package(Multi, 15PCS Packing)	595.0mm*305.0mm*345.0mm	13.3Kg

10. RoHS

OPHIT is fully aware of the requirement under the **Restriction of Hazardous Substances in Electrical and Electronic Equipment Directive EU 2015/863(RoHS3)**, which adds four new restricted substances to the previous Directive 2011/65/EU(RoHS2).

Hereby we guarantee that we do not intentionally use the substances described below and based on third party chemical analysis the thresholds of the substances as indicated are not exceeded for our all products.

Substance	CAS #	RoHS Limity by % (PPM)
Lead (PB)	7439-92-1	0.1% (1000 PPM)
Mercury (Hg)	7439-97-6	0.1% (1000 PPM)
Hexavalent Chromium (CrVI)	15840-29-9	0.1% (1000 PPM)
Polybrominated Biphenyls (PBB)	-	0.1% (1000 PPM)
Polybrominated Diphenyl Ethers (PBDE)	-	0.1% (1000 PPM)
Cadmium (Cd)	7440-43-9	0.01% (100 PPM)
Bis(2-Etylhexyl) phthalate(DEHP)	117-81-7	0.1% (1000 PPM)
Benzyl butyl phthalate(BBP)	85-68-7	0.1% (1000 PPM)
Dibutyl Phthalate(DBP)	84-74-2	0.1% (1000 PPM)
Disobutyl Phthalate(DIBP)	84-69-5	0.1% (1000 PPM)

Banned Substances by RoHS Directive 2011/65/EU+2015/863/EU, EN50581:2012

OPHIT will continue to monitor any new amendments/changes to Directive and subsequently review our all products with regards to compliance. OPHIT will also ensure that any new information is communicated to its customers, suppliers and stakeholders as required.

Signature : Jong-Kook, Moon *Jong-kook, Moon*
Title/Issue date : President/July.22.2019

11. REACH

The European REACH Regulation 1907/2006 on Registration, Evaluation, Authorization, and Restriction of Chemicals(REACH), Annex XV II entered into Force in June 2009, and affects all companies producing, Importing, using, or placing Products on the European market. The aim of the REACH regulation is to ensure a high Level of protection of human health and the environment from chemical substances.

OPHIT Co., Ltd substances management system follow and complies with the current revision of the REACH Regulation on the substances as identified by ECHA(European Chemical Agency).

OPHIT Co., Ltd products are considered articles as defined in REACH Article 3(3). These products/articles under normal and reasonable conditions of use do not have intended release of substances. Therefore the requirement in REACH Article 7(1)(b) for registration of substances contained in these products/articles does not apply.

OPHIT Co., Ltd products/articles, do not contain **Substances of very High Concern** or if there **SVHC** in the product/article, the content is less than the 0.1%(wt/wt) as defined by REACH Article 57, Annex XIV, Directive 67/548/EEC. Therefore the requirement in REACH Article 7(2) to notify ECHA if a product/article contains more than 0.1% wt/wt of an SVHC and tonnage exceeding 1 tone per importer per year is not applicable.

OPHIT's European operations do not manufacture or import chemicals, therefore OPHIT Co., Ltd has no obligation to resister substances.



Jong-Kook, Moon
President

OPHIT Co., Ltd ACCEPTS NO DUTY TO NOTIFY USERS OF THIS OF DECLARATION OF UPDATES OR CHANGES TO THIS DECLARATION.