PRODUCT DATA SHEET

HSC

HDMI to SDI Converter



Revision History

| Version Number | Revision Date | Page | Description of Changes | |
|-------------------|---------------|------|------------------------------|--|
| 1.0 | May.25.2011 | ALL | Initial Version | |
| 1.1 | Dec.13.2011 | 4 | Support resolution modified | |
| 1.2 | Mar.15 2012 | 4 | Support resolution added | |
| 1.3 | Apr.20.2012 | 8 | Ordering Information Removed | |
| 1.4 | Nov.06.2019 | ALL | Renewal Specification | |

PROPRIETARY NOTE

*THIS DOCUMENT CONTAINS INFORMATION CONFIDENTAL AND PROPIETARY TO OPHIT CO.,LTD

AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS ORDISCLOSED TO OTHERS

OR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED

AND WRITTEN CONSENT OF OPHIT INCOPORATION

TABLE OF CONTENTS

| 1. General Description | 4 |
|----------------------------------|-----|
| 2. General Specification | 4 |
| 3. Absolute Maximum Ratings | 5 |
| 4. Electrical Specification | 6 |
| 4.1 Electrical Specification | |
| 4.2 Connector Pin Assignment | |
| 4.2.1 Input Port | |
| 4.2.2 Output Port | |
| 5. Mechanical Specification | 7 |
| 5.1 Case Dimension | |
| 5.2 Connection | |
| 6. Regulatory | 8 |
| 6.1 EMC & Safety Agency approval | |
| 6.1.1 CE-EMC compliance | |
| 6.1.2 FCC compliance | |
| 7. Packing Information | 8 |
| 8. RoHS | |
| 0.05400 | 4.4 |

1. General Description

OPHIT 's **HSC** is perfect solution for converting HDMI signal to SDI signal.

It enables HDMI compliant device to be connected to digital display with SDI input.

It can also split one HDMI signal to two SDI signal at the same time.

Converts HDMI signal to SDI signal

• Input: 1 x HDMI / Output: 2 x SDI

Compliant with HDMI1.3

Support two SDI output for cascade function

Input signal detection monitoring function (LED)

2. General Specification

| Input port | TMDS | | |
|-------------------|---------------------------------------------------|--|--|
| HDMI Input Signal | 480i @ 60Hz, | | |
| Resolution | 720p @ 50, 59.94/60Hz, | | |
| | 1080i @ 50, 59.94/60Hz, | | |
| | 1080p @ 23.98/24, 25, 29.97/30, 50 and 59.94/60Hz | | |
| Output port | SD/HD/3G-SDI | | |
| SDI Output Signal | 480i @ 60Hz, | | |
| Resolution | 720p @ 50, 59.94/60Hz, | | |
| | 1080i @ 50, 59.94/60Hz, | | |
| | 1080p @ 23.98/24, 25, 29.97/30, 50 and 59.94/60Hz | | |
| Connector | | | |
| Input | HDMI | | |
| Output | BNC x 2 | | |
| Power | DC-JACK 2.1 pie | | |
| General | | | |
| Dimensions | 87x118.3x23.2mm (W x D x H) | | |
| Weight | 193.0g | | |
| Enclosure Color | Navy | | |
| Power | DC +12V, 1.0A | | |

3. Absolute Maximum Ratings

| Parameter | Rating | |
|----------------------------|---------------------------------|--|
| Storage temperature | -20°C ~ +70°C Non-Condensing | |
| Operating temperature | 0°C ~ +50°C Non-Condensing | |
| Transportation temperature | -20°C ~ +70°C Non-Condensing | |
| Power Supply | -0.3 ~ 12 V | |
| Relative Humidity | 10 ~ 80 % | |
| Lead solder temperature | 260°C, 10 seconds | |

NOTICE

Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operations section for extended periods of time may affect reliability.


4. Electrical Specification

4.1 Electrical Specification

| | Parameter | Symbol | Min | Тур | Max | Units | Condition |
|--------|---------------------------------------|--------|-----------|-------|-----------|-------|------------|
| P 0 | Supply Voltage | Vcc | | +12.0 | | V | |
| W | Supply Current | Icc | | 0.21 | | Α | 1080p/60Hz |
| E R | Power Dissipation | Ро | | 2.52 | | W | 1080p/60Hz |
| | Reference voltage for graphic signal | Vref | +3.1 | +3.3 | +3.5 | V | |
| | Single-ended high level input voltage | VH | Vref-0.01 | | Vref+0.01 | V | |
| T M | Single-ended low level input voltage | VL | Vref-0.6 | | Vref-0.4 | V | |
| D S | Single-ended input swing voltage | Vswing | 0.4 | | 0.6 | V | |
| | Single-ended standby input voltage | | Vref-0.01 | | Vref+0.01 | V | |
| | Data Output Load | RLD | | 50 | | Ohms | |

4.2 Connector Pin Assignment


4.2.1 Input port



Type A Receptacle HDMI


| Pin | Signal Assignment | Pin | Signal Assignment |
|-----|------------------------|-----|---------------------------|
| 1 | T.M.D.S. Data 2+ | 2 | T.M.D.S. Data 2 Shield |
| 3 | T.M.D.S. Data 2- | 4 | T.M.D.S. Data 1+ |
| 5 | T.M.D.S. Data 1 Shield | 6 | T.M.D.S. Data 1- |
| 7 | T.M.D.S. Data 0+ | 8 | T.M.D.S. Data 0 Shield |
| 9 | T.M.D.S. Data 0- | 10 | T.M.D.S. Clock+ |
| 11 | T.M.D.S. Clock Shield | 12 | T.M.D.S. Clock- |
| 13 | CEC | 14 | Reserved (N. C on device) |
| 15 | SCL | 16 | SDA |
| 17 | DDC/CEC Ground | 18 | +5V Power |
| 19 | Hot Plug Detect | | |

4.2.2 Output port




| Pin | Signal Assignment | | |
|-----|---------------------|--|--|
| 1 | SMPTE Signal Output | | |

5. Mechanical Specification 5.1 Case Dimension

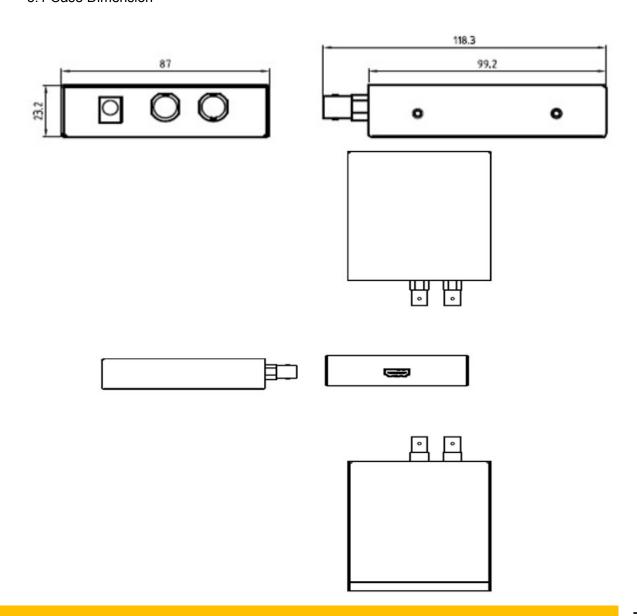

5.2 Connection

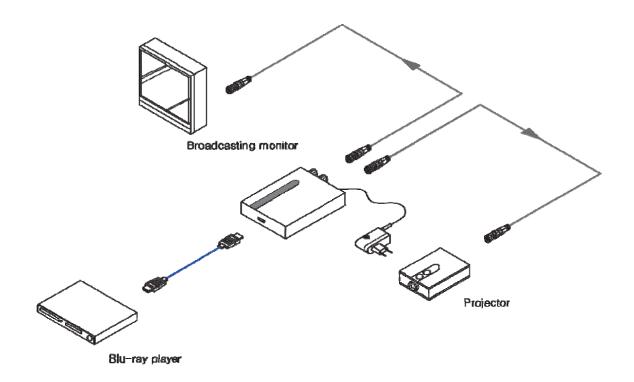

6. Regulatory

6.1 EMC & Safety Agency approval

6.1.1 CE-EMC compliance:

This Product is investigated to EN55022:2006/A1:2007, EN55024:1998/A2/2003, EN 61000-3-2:2006 and EN61000-3-3:2008

6.1.2 FCC compliance:

This Product is investigated to FCC 47CFR part 2 and part 15

7. Packing Information

| Set(Unpacking, HSC Only) | 87mm*118.3mm*23.2mm | 193.0g |
|----------------------------------|-------------------------|--------|
| Package(1Set, Inner Box Packing) | 242.0mm*185.0mm*70.0mm | 465.0g |
| Package(Multi, 15PCS Packing) | 595.0mm*305.0mm*345.0mm | 9.0Kg |

8. RoHS

OPHIT is fully aware of the requirement under the Restriction of Hazardous Substances in Electrical and Electronic Equipment Directive EU 2015/863(RoHS3), which adds four new restricted substances to the previous Directive 2011/65/EU(RoHS2).

Hereby we guarantee that we do not intentionally use the substances described below and based on third party chemical analysis the thresholds of the substances as indicated are not exceeded for our all products.

| Substance | CAS# | RoHS Limity by % (PPM) |
|---------------------------------------|------------|------------------------|
| Lead (PB) | 7439-92-1 | 0.1% (1000 PPM) |
| Mercury (Hg) | 7439-97-6 | 0.1% (1000 PPM) |
| Hexavalent Chromium (CrVI) | 15840-29-9 | 0.1% (1000 PPM) |
| Polybrominated Biphenyls (PBB) | - | 0.1% (1000 PPM) |
| Polybrominated Diphenyl Ethers (PBDE) | - | 0.1% (1000 PPM) |
| Cadmium (Cd) | 7440-43-9 | 0.01% (100 PPM) |
| Bis(2-Etylhexyl) phthalate(DEHP) | 117-81-7 | 0.1% (1000 PPM) |
| Benzyl butyl phthalate(BBP) | 85-68-7 | 0.1% (1000 PPM) |
| Dibutyl Phthalate(DBP) | 84-74-2 | 0.1% (1000 PPM) |
| Disobutyl Phthalate(DIBP) | 84-69-5 | 0.1% (1000 PPM) |

Banned Substances by RoHS Directive 2011/65/EU+2015/863/EU, EN50581:2012

OPHIT will continue to monitor any new amendments/changes to Directive and subsequently review our all products with regards to compliance. OPHIT will also ensure that any new information is communicated to its customers, suppliers and stakeholders as required.

Signature: Jong-Kook, Moon

Title/Issue date: President/July.22.2019

9. REACH

The European REACH Regulation 1907/2006 on Registration, Evaluation, Authorization, and Restriction of Chemicals(REACH), Annex XV II entered into Force in June 2009, and affects all companies producing. Importing, using, or placing Products on the European market. The aim of the REACH regulation is to ensure a high Level of protection of human health and the environment from chemical substances.

OPHIT Co., Ltd substances management system follow and complies with the current revision of the REACH Regulation on the substances as identified by ECHA(European Chemical Agency).

OPHIT Co., Ltd products are considered articles as defined in REACH Article 3(3). These products/articles under normal and reasonable conditions of use do not have intended release of substances. Therefore the requirement in REACH Article 7(1)(b) for registration of substances contained in these products/articles does not apply.

OPHIT Co., Ltd products/articles, do not contain **Substances of very High Concern** or if there **SVHC** in the product/article, the content is less than the 0.1%(wt/wt) as defined by REACH Article 57, Annex XIV, Directive 67/548/EEC. Therefore the requirement in REACH Article 7(2) to notify ECHA if a product/article contains more than 0.1% wt/wt of an SVHC and tonnage exceeding 1 tone per importer per year is not applicable.

OPHIT's European operations do not manufacture or import chemicals, therefore OPHIT Co., Ltd has no obligation to resister substances.

Jong-Kook, Moon

Jung-Kook, Moon

President

OPHIT Co., Ltd ACCEPTS NO DUTY TO NOTIFY USERS OF THIS OF DECLARATION OF UPDATES OR CHANGES TO THIS DECLARATION.